

AUTOMATION FOR GARAGE DOORS AND GATES

Gate automation. Devices that allow you to open garage or industrial gate doors along with the necessary accessories such as a control console and remote control.

ACCESSORIES




EMERGENCY RELEASE FOR GARAGE DOORS - CABLE

ARTICLE: 80010

material: zinc plated steel
dia: 25mm
cable length: 1800mm
set includes: insert with attached steel cable and a cover for a lock, 2 keys, compression sleeve for the cable

Factory price: € excl. VAT / piece
Weight: 0.16 kg **Shipping class:** Standard



4 CORE SPIRAL CABLE WITH SHORT ENDS

ARTICLE: abel spiralny 4

length of cable ends: 300/300mm
dia: 25mm
applied in automation for sectional doors


Factory price: € excl. VAT / piece
Weight: 0.52 kg **Shipping class:** Standard
Tag: [kabel spiralny](#)

OPERATOR DISCONNECT SET

ARTICLE: 89405

dia: 20mm
dimensions: 62x27mm
finish: zinc plated
includes: 2x keys, 1x 2.4m cable, 1x S-hook, 2x 10-24 screw with nut and washer (need 11/32" or 9mm key), instruction sheet

Factory price: € excl. VAT / piece
Weight: 0.136 kg **Shipping class:** Standard





5 CORE SPIRAL CABLE WITH SHORT ENDS

ARTICLE: abel spiralny 5

length of cable ends: 300/300mm
dia: 25mm
applied in automation for sectional doors

Factory price: € excl. VAT / piece
Weight: 0.5 kg **Shipping class:** Standard



4 CORE SPIRAL CABLE WITH LONG ENDS

ARTICLE: abel spiralny 4 PLUS

length of cable ends: 1500/300mm
dia: 25mm
applied in automation for sectional doors

Factory price: € excl. VAT / piece
Weight: 0.60 kg **Shipping class:** Standard



RADIO TRANSMITTER FOR IDEAL OPERATORS

ARTICLE: 43001

Three-channel radio transmitter for IDEAL operator
Rolling code
Frequency 433,92 MHz

Factory price: 12.00 € excl. VAT / piece
Weight: 0.3 kg **Shipping class:** Standard



PREWIRED SWITCH 3 POSITIONS WITH SPRING RETURN

ARTICLE: CPS1C5

PREWIRED SWITCH 3 POSITIONS WITH SPRING RETURN
5m cable SCHUCO socket

Factory price: 221.00 € excl. VAT / piece
Weight: 14.500 kg **Shipping class:** Standard



FOUR CHANNELS TRANSMITTER 433 MHZ

ARTICLE: CTE

Miniature transmitter in a simple and elegant design. The buttons' layout enables an intuitive approach of the four channels. The integrated slot can be hooked to a key-ring while the long lasting lithium battery provides power for years of daily use. Dimensions: 35x53x12mm.

Factory price: 25.00 € excl. VAT / piece
Weight: 14.500 kg **Shipping class:** Standard



EMERGENCY RELEASE LOCK

ARTICLE: 80004

material: galvanised steel
Releases garage door operator in case of power failures.

Factory price: 31.00 € excl. VAT / piece
Weight: 0.6 kg **Shipping class:** Standard

GARAGE DOOR OPERATORS



OPERATOR FOR GARAGE DOORS IDEAL 12

ARTICLE: 12

Set of motor for garage door and 2 remote control units
Closing /opening force: 1200 N
Power supply: 220 V
Max door area = 13m sq;

Factory price: 110.86 € excl. VAT / piece
Weight: 3 kg **Shipping class:** Standard
Tag: [Napęd](#)



OPERATOR FOR GARAGE DOORS IDEAL 8

ARTICLE: 08

Set of motor for garage door and 2 remote control units
Closing /opening force: 800 N
Power supply: 220 V
Max door area = 9m sq;

Factory price: 101.63 € excl. VAT / piece
Weight: 3 kg **Shipping class:** Standard



STEEL RAIL WITH CHAIN FOR IDEAL OPERATOR L=3300MM

ARTICLE: 33

Single piece steel rail with steel chain for IDEAL operator for garage door of max height H=2400mm
Length = 3300mm
Steel chain

Factory price: 22.17 € excl. VAT / piece
Weight: 5 kg **Shipping class:** Dłużyca



STEEL RAIL WITH CHAIN FOR IDEAL OPERATOR L=3600MM

ARTICLE: 36

Single piece steel rail with steel chain for IDEAL operator for garage door of max height H=2700mm
Length = 3600mm
Steel chain

Factory price: 25.87 € excl. VAT / piece
Weight: 5 kg **Shipping class:** Dłużyca



STEEL RAIL WITH CHAIN FOR IDEAL OPERATOR L=4200MM

ARTICLE: 42

Single piece steel rail with steel chain for IDEAL operator for garage door of max height H=4200mm
Length = 3000mm
Steel chain

Factory price: 31.41 € excl. VAT / piece
Weight: 5 kg **Shipping class:** Dłużyca



STEEL RAIL WITH CHAIN FOR IDEAL OPERATOR L=5200MM

ARTICLE: 52

Single piece steel rail with steel chain for IDEAL operator for garage door of max height H=4300mm
Length = 5200mm
Steel chain

Factory price: 46.19 € excl. VAT / piece
Weight: 5 kg **Shipping class:** Dłużyca



STEEL RAIL WITH KEVLAR BELT FOR IDEAL OPERATOR L=3300MM

ARTICLE: 33

Single piece steel rail with Kevlar belt for IDEAL operator for garage door of max height H=2400mm
Length = 3300mm
Kevlar belt

Factory price: 42.50 € excl. VAT / piece
Weight: 5 kg **Shipping class:** Dłużyca



STEEL RAIL WITH KEVLAR BELT FOR IDEAL OPERATOR L=3600MM

ARTICLE: 36

Single piece steel rail with Kevlar belt for IDEAL operator for garage door of max height H=2700mm
Length = 3600mm
Kevlar belt

Factory price: 44.35 € excl. VAT / piece
Weight: 5 kg **Shipping class:** Dłużyca

STEEL RAIL WITH KEVLAR BELT FOR IDEAL OPERATOR L=4200MM



ARTICLE: 42

Single piece steel rail with Kevlar belt for IDEAL operator for garage door of max height H=3300mm
Length = 4200mm
Kevlar belt

Factory price: 48.04 € excl. VAT / piece

Weight: 7.8 kg **Shipping class:** Dłużyca

EXTERNAL RADIO RECEIVER FOR IDEAL OPERATORS




ARTICLE: 43020

External radio receiver for installation in other equipment to be operated by IDEAL radio transmitters
Rolling code
Frequency 433,92 MHz

Factory price: 18.48 € excl. VAT / piece

Weight: 0.00 kg **Shipping class:** Standard

INDUSTRIAL GATES OPERATORS

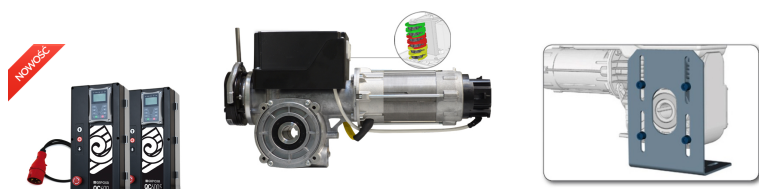

QC600C5 AUTOMATIC CONTROL PANEL WITH FREQUENCY INVERTER FOR DRIVES WITH DIGITAL LIMITS 230V 50HZ MONO MAX. 0,75KW

ARTICLE: C600C5

- 2 Photocell terminals with test Safetyedge PNE /8,2 ohms
- Opto sensor
- Torque control
- Half opening
- Display true type
- Thermosafety
- DC Break/break resist
- Lamp pcb plug for more options
- 3 Dry Relays
- Cross traficcontrol
- Radio-plug in
- Limit Encoder
- Autoclose
- 4 inputs
- 24v aux 250mA
- 2 Rs485 input
- Can-bus

Factory price: 400.00 € excl. VAT / piece
Weight: 14.500 kg **Shipping class:** Standard

PREWIRED SWITCH 3 POSITIONS WITH SPRING RETURN



ARTICLE: CPS1C5

PREWIRED SWITCH 3 POSITIONS WITH SPRING RETURN
5m cable SCHUCO socket

Factory price: 221.00 € excl. VAT / piece
Weight: 14.500 kg **Shipping class:** Standard


FOUR CHANNELS TRANSMITTER 433 MHZ



ARTICLE: CTE

Miniature transmitter in a simple and elegant design. The buttons' layout enables an intuitive approach of the four channels. The integrated slot can be hooked to a key-ring while the long lasting lithium battery provides power for years of daily use. Dimensions: 35x53x12mm.

Factory price: 25.00 € excl. VAT / piece
Weight: 14.500 kg **Shipping class:** Standard



SINGLE-PHASE MOTOR DRIVE, TORQUE 70NM, 21RPM, 3-CAM LIMITER

ARTICLE: HS70MDH

The BHS is a spring balanced sectional door motor. The worm gear ensures that the operator is only mounted in the vertical position.

Motor overload safety factor = 4 x rated motor current, as the BHS starting current can reach these levels for short periods.

Manual operation

In BHS installations with a hand crank or hand chain, the door and the self-locking gear structure are always connected. The door will never fall if the spring breaks. In BHS installations with a door disconnect device, the door and the self-locking worm gear are disconnected during manual operation. In this case, the worm gear no longer supports the door and a spring safety brake is required.


The BHS drive unit is able to support the weight of the door when the spring breaks, preventing the door from falling. The holding capacity is the permissible load that the worm gear structure can withstand.

EUROPEAN DIRECTIVES

The drive is manufactured in accordance with the product standards EN 13241-1 Doors and EN 12453 Safety of power-driven doors.

Factory price: 441.86 € excl. VAT / piece

Weight: 0.00 kg **Shipping class:** Standard



BRD60130 DRIVE 230V/400V 50HZ SPEED 60NM 130RPM LIMITER WITH 3 CAMS

ARTICLE: 1

• Rapido is a three-phase motor, ideal for the high-speed door market. • The installer can independently change the gear motor power supply connection from star (400 V) to delta (230 V) and vice versa.

All models are equipped with an electromagnetic brake that suddenly stops the motor inertia, and an integrated safety brake.

Mechanical limit switch: 2 green cams for operating limits, 2 red cams for safety limits, 2 yellow cams for auxiliary control.

OVERLOAD SAFETY FACTOR

The motor overload safety factor = 4 x the motor rated current, since the Rapido starting current can reach these levels for a short time.

MANUAL OPERATION

Rapido is supplied with a crank for manual operation in the event of a power failure

EUROPEAN DIRECTIVES

The motor is manufactured in accordance with the product standards EN 13241-1 Doors- and EN 12453 Safety for electrically operated doors.

Factory price: 599.00 € excl. VAT / piece

Weight: 0.00 kg **Shipping class:** Standard